










# PEKAZETT 2510 SM


Leistungsdaten performance data details techniques	Ausladung (m) radius portée	Tragkraft (kg) lifting capacity capacité	Max. Tragkraft (kg) lifting capacity max. capacité max.			
	25	1000	2500			
Geschwindigkeiten speeds vitesses	Heben lifting levage					
			m/min.	kg	m/min	kg
	 		45	1250	-	-
			22	2500	-	-
			5	2500	-	-
	Katzfahren trolley drive / chariotage				m/min.	20/40
Kranfabren traveling / translation				m/min.	30	
Drehen (stufenlos) slewing / rotation				r. p. m.	0,1 ↔ 0,9	

## Allgemeine technische Daten

general technical data / details techniques generaux


Konstruktionsgewicht weight / poids de la grue	kg	8000	Ges. elektr. Leistung motor power / puissance totale	kW	18
Gegengewicht counterweight / contrepoids	kg	12.500*	Kabelquerschnitt cable section / section du câble	380 V	5 x 10 <sup>2</sup>
Max. Eckdruck max. wheel load / pression max.	kN	115	Kabeltrommel cable drum / tambour	50	50
Spurweite track gauge / écartement	m	3,8	Schienenprofil rail profile / profilé du rail		S18-S24
Radstand wheel gauge / voie	m	3,8			
Drehradius slewing radius / rayon de giration	m	2,5	* Gegengewicht CH counterweight CH / contrepoids CH 14.500 kg		

## Montage Assembly Montage

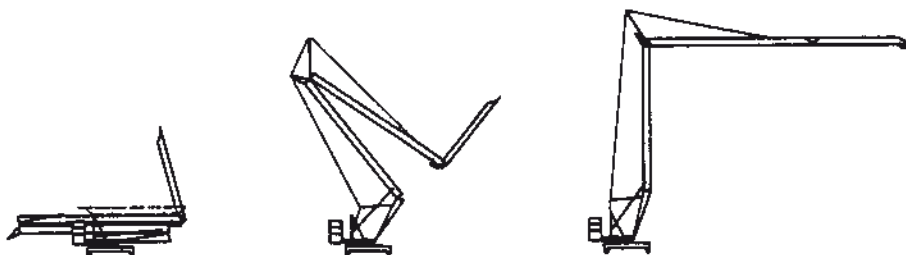

# PEKAZETT 2510 SM

DIN 15018  
 BGL 2102-0025  
 25 m - 1000 kg, max. - 2500 kg

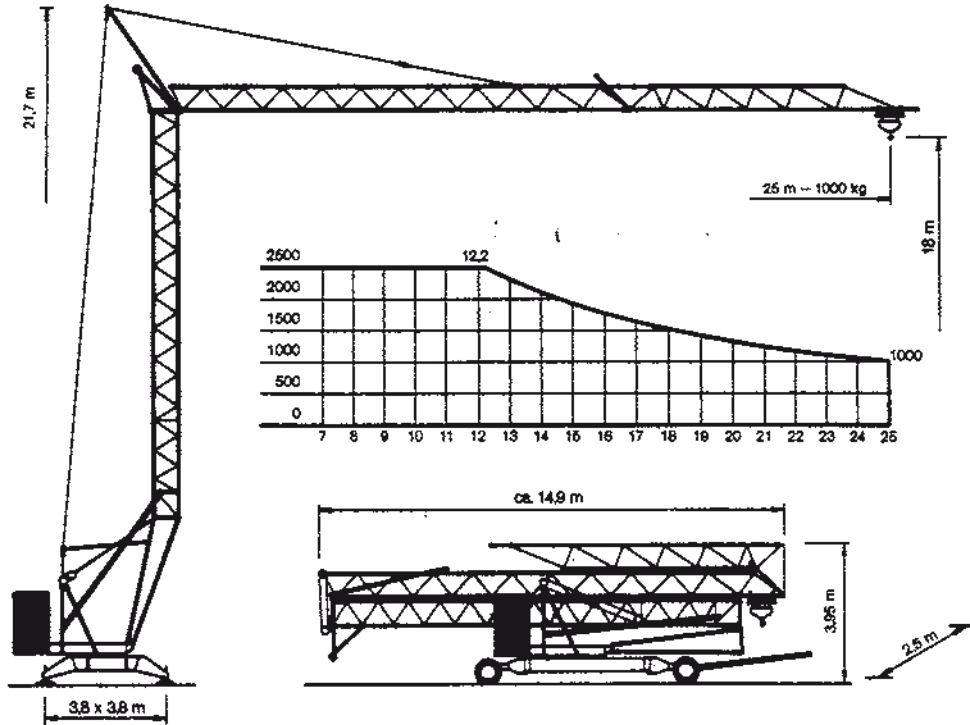

**Montage - Platzbedarfsdiagramm**  
 Assembly - Space required diagram  
 Montage - Surface utile

